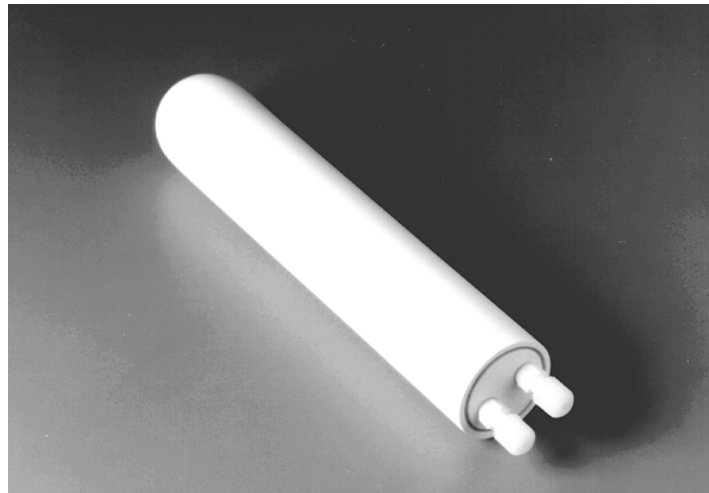

1922 "ULTRA" SOIL WATER SAMPLER



Description:

Used to collect pore liquid samples from the unsaturated zone under conditions where PVC materials are not desired. All ceramic construction fabricated from high-fired alumina ceramic, heavy wall construction, with Teflon fittings and tubing for an "ultra clean" sampling environment. Capable of sensitivities in the parts-per-billion. Glazed inner reservoir.

Specifications

Outside Diameter:	1.9 inches (4.8 cm)
Inside Diameter:	1.6 inches (4.06 cm)
Length:	10 inches (25.4 cm)
Total Sampler Volume:	250 ml
Total Volume of Retained Sample In Glazed Reservoir:	80 ml
Ceramic Material:	1 Bar High Flow, High Alumina
Operating Suction:	0 to 80 cb
Operating Depth:	0 to 50 feet
Stainless Steel or Teflon Compression Fittings:	1/4" Stainless or reduce to 1/8"

Accessories

<u>Part No.</u>	<u>Description</u>
0922W050	Granular Bentonite, 50-lb. bag
0930W050	Silica Flour, 200 mesh, 50-lb. bag
1900K4	Polypropelene Mason Jar, 1,000 ml
2006G2	Pressure/Vacuum Hand Pump with Gauge
2031G3	Clamping Ring for 1/8 inch tubing, per dozen
MRT001	Neoprene Tubing 1/16 inch I.D. by 1/16 inch wall
MXT004	Teflon Tubing, 1/8 inch O.D. by 0.030 inch wall
MZL017	1/4 inch to 1/8 inch Kynar Reducer
MST048	1/8-inch Stainless Steel Tubing

SOILMOISTURE EQUIPMENT CORP.

P.O. Box 30025, Santa Barbara, California 93130 USA
Phone: (805) 964-3525 - Fax: (805) 683-2189
e-mail: sales@soilmoisture.com - Web: <http://www.soilmoisture.com>



1923 LARGE VOLUME "ULTRA" SOIL WATER SAMPLER



Description:

Used to collect pore liquid samples from the unsaturated zone under conditions where PVC materials are not desired. All ceramic construction fabricated from high-fired alumina ceramic, heavy wall construction, with Teflon fittings and tubing for an "ultra clean" sampling environment. Capable of sensitivities in the parts-per-billion. Glazed inner reservoir, includes casing adapter to 1.5-inch PVC casing.

Specifications

Outside Diameter:	4.0 inches (10.2 cm)
Inside Diameter:	3.37 inches (8.6 cm)
Length:	18 inches (45.7 cm)
Total Sampler Volume:	1,730 ml
Total Volume of Retained Sample In Glazed Reservoir:	560 ml
Ceramic Material:	1 Bar High Flow, High Alumina
Operating Suction:	0 to 80 cb
Operating Depth:	0 to 50 feet
Stainless Steel or Teflon Compression Fittings:	1/8" NPT x 1/4" OD Tube

Accessories

<u>Part No.</u>	<u>Description</u>
0922W050	Granular Bentonite, 50-lb. bag
0930W050	Silica Flour, 200 Mesh, 50-lb. bag
1900K4	Polypropylene Mason Jar, 1,000 ml
2006G2	Pressure/Vacuum Hand Pump with Gauge
2031G2	Clamping Ring for 1/4 inch tubing, per dozen
MRT003	Neoprene Tubing 3/16 inch I.D. by 3/16 inch wall
MST045	1/4 inch Stainless Steel tubing
MXL005	1/4 inch O.D. Tube, Teflon union
MXT006	Teflon Tubing, 1/4 inch O.D. by 0.030 inch wall
MYL026	1/4 inch O.D. Tube, nylon union

SOILMOISTURE EQUIPMENT CORP.

P.O. Box 30025, Santa Barbara, California 93130 USA

Phone: (805) 964-3525 - Fax: (805) 683-2189

e-mail: sales@soilmoisture.com - Web: <http://www.soilmoisture.com>

